


一、性能表

I .CHARACTERISTICS LIST

外形尺寸 Outline Dimensions

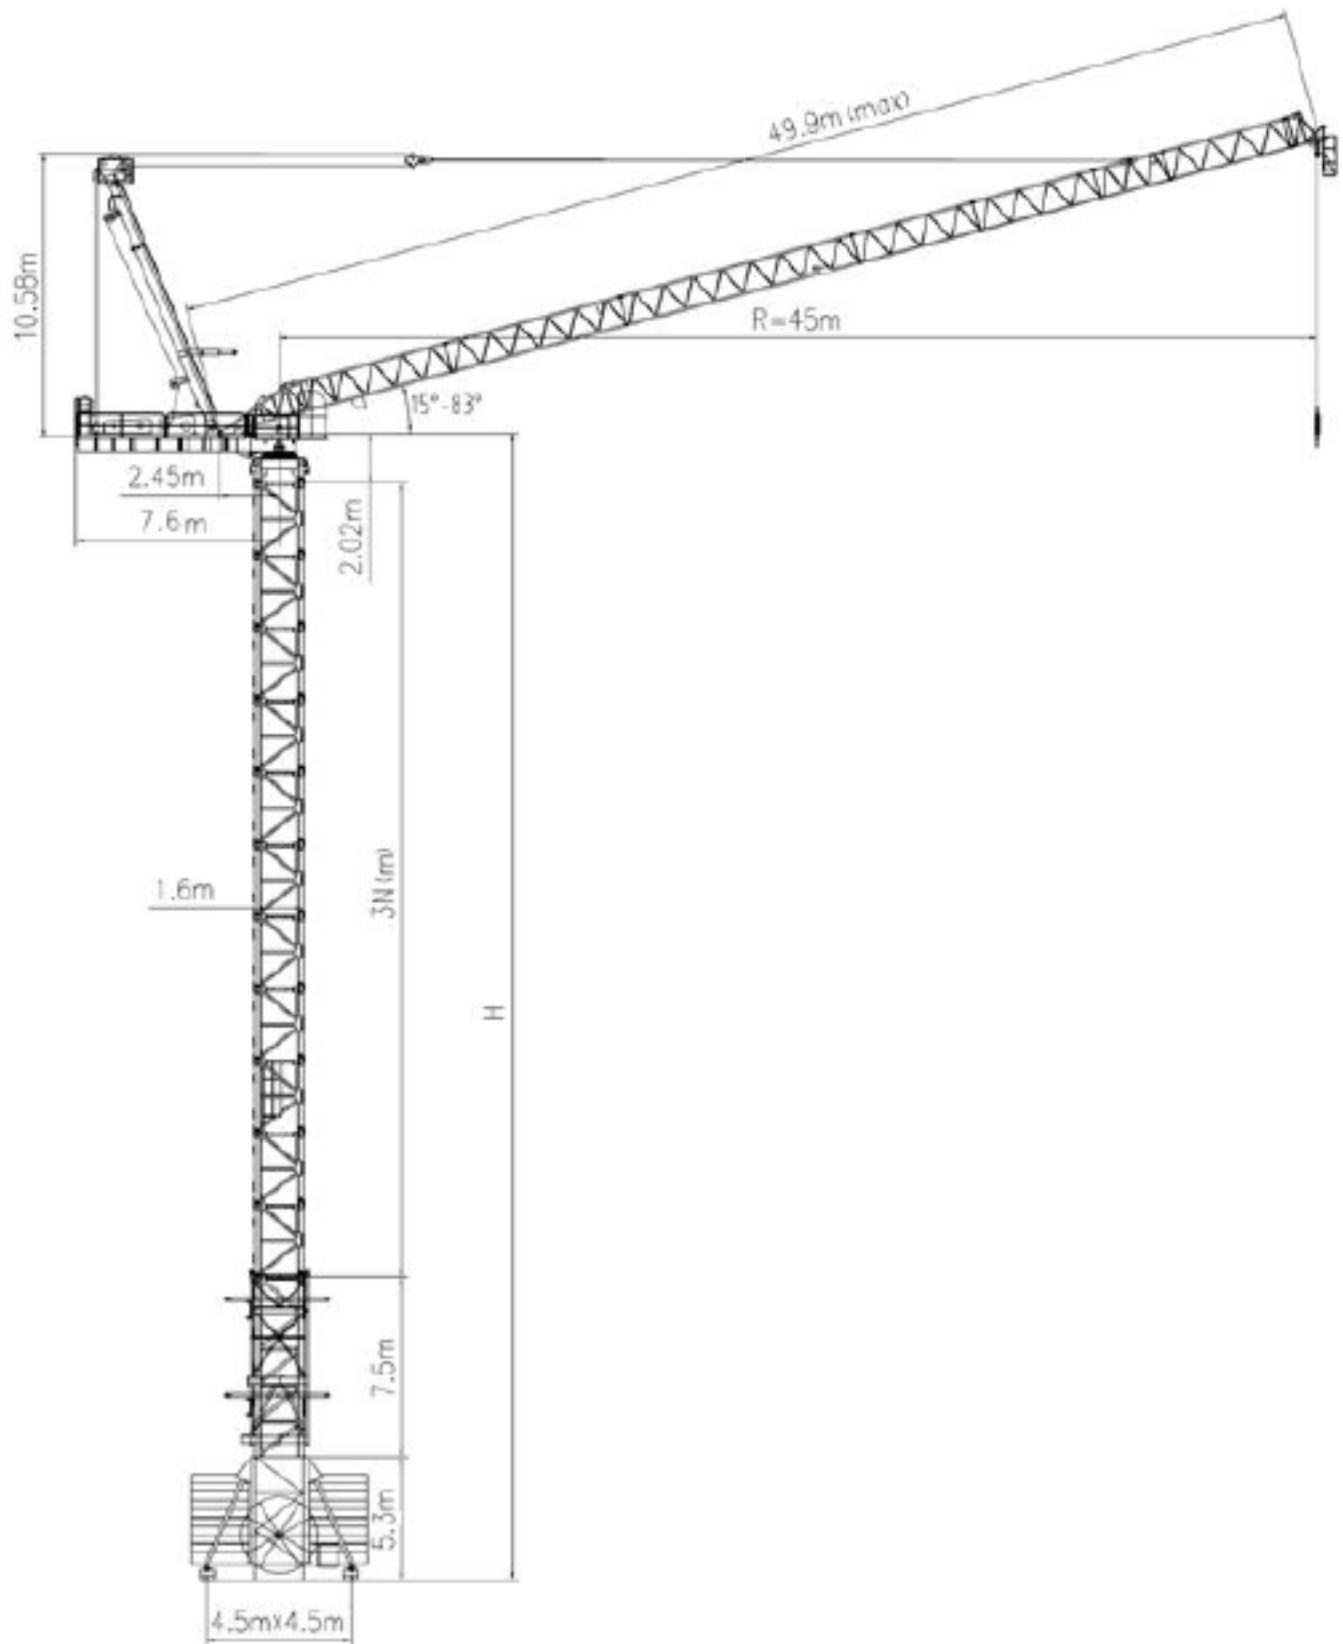

载荷特性表 Load Diagrams

起重臂 Jib (m)	倍率 Fall	起重 幅度 (m)	Range	3.5~18.6	20	25	30	32	35	40					
			luffing degree	83.5° ~65.5°	63.5°	57°	50°	46.5°	41.5°	30.6°					
45	IV	起重重量 Load (t)	8.0							7.3	5.5	4.2	4	3.3	2.6
	II		4										3.3	2.6	

起重臂 Jib (m)	倍率 Fall	起重 幅度 (m)	Range	45
			luffing degree	15°
45	IV	起重重量 Load (t)	2.2	
	II		2.2	

起重臂 Jib (m)	倍率 Fall	起重 幅度 (m)	Range	3.5~18.6	20	25	30	32	35	40					
			luffing degree	82.7° ~62°	60°	52°	43°	39°	32°	15°					
40	IV	起重重量 Load (t)	8.0							7.3	5.5	4.3	4	3.4	2.6
	II		4										3.4	2.6	

起重臂 Jib (m)	倍率 Fall	起重 幅度 (m)	Range	3.5~18.6	20	25	30	32	35					
			luffing degree	81.6° ~58°	55°	45.4°	33.6°	27.5°	15°					
35	IV	起重重量 Load (t)	8.0							7.4	5.6	4.4	4	3.4
	II		4										3.4	

起重臂 Jib (m)	倍率 Fall	起重 幅度 (m)	Range	3.5~18.6	20	25	30		
			luffing degree	81° ~52°	48.5°	35.5°	15°		
30	IV	起重重量 Load (t)	8.0				7.4	5.6	4.4
	II		4						